

2825A SCU

2825B

2825C

2825E

2825F

2825L


2825P

2825R

2825RA

2825S

2825T



Descrizione di riferimento vedi Art. 2822A

Tipo scanalato con smusso - DIN 6315 B.

Art.		2825A	2825B	2825C	2825E	2825F	2825L
Filett. bulloni	M.	8	10	12-14	12-14	16-18	16-18
Largh. cava (C)	mm	9	11	14	14	18	18
Lungh. (L)	mm	80	100	125	160	160	200
Spessore (A)	mm	15	20	25	25	30	30
Largh. (B)	mm	25	30	40	40	50	50
Cad.		17,90	21,20	20,80	23,10	26,10	29,20

Art.		2825P	2825R	2825RA	2825S	2825T
Filett. bulloni	M.	20-22	20-22	24	24	24
Largh. cava (C)	mm	22	22	26	26	26
Lungh. (L)	mm	200	250	200	250	315
Spessore (A)	mm	40	40	40	40	40
Largh. (B)	mm	50	60	70	70	70
Cad.		40,10	49,80	44,70	55,40	81,70


2826A SCU

2826B

2826C

2826E

2826L



Descrizione di riferimento vedi Art. 2822A

Tipo scanalato con nasello.


Art.		2826A	2826B	2826C	2826E	2826L
Filett. bulloni	M.	8	10	12-14	16-18	20-22
Largh. cava (C)	mm	9	11	14	18	22
Lungh. (L)	mm	100	125	160	200	250
Spessore (A)	mm	15	20	25	30	40
Largh. (B)	mm	30	30	40	50	60
Largh. nasello (F)	mm	16	20	25	28	35
Cad.		20,10	24,20	29,80	42,20	69,40

2827A SCU

2827B

2827D

2827E

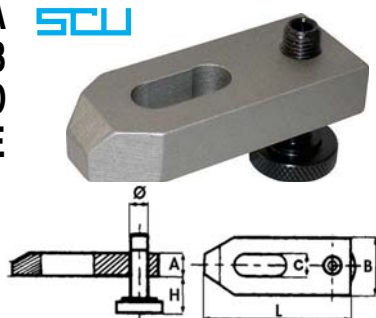

Descrizione di riferimento vedi Art. 2822A


Tipo semplice con vite regolabile - Simile a DIN 6314.

Art.		2827A	2827B	2827D	2827E
Filett. bulloni	M.	10	12-14	16-18	20-22
Largh. cava (C)	mm	11	14	18	22
Lungh. (L)	mm	80	100	125	160
Spessore (A)	mm	15	20	25	30
Largh. (B)	mm	30	40	50	60
Altezza regolabile (H)	mm	8-28	10-32	13-40	18-60
Diametro vite	M.	10	12	16	20
Cad.		26,50	31,50	45,30	68,20

2827GL SCU

2827GP

2827GT

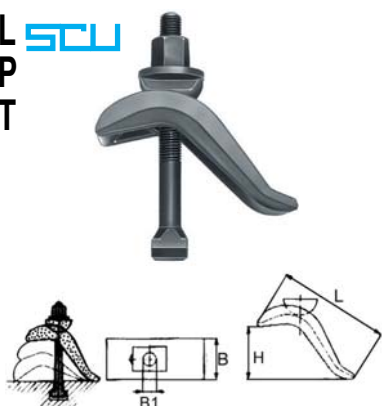

Descrizione di riferimento vedi Art. 2822A

Tipo curvo regolabile, completo di vite per cave, dado e rondella. Indicato per serrare corpi di alto spessore in spazi ristretti.

Art.		2827GL	2827GP	2827GT
Lungh. (L)	mm	140	140	175
Largh. (B)	mm	50	50	60
Altezza (H) fino	mm	50	75	85
Filett. vite	M.	12x125	16x160	20x200
Ø foro (B1)	mm	17	17	21
Cad.		134,00	148,00	205,00

2828A SCU


2828B

2828C

2828D

2828E

2828F

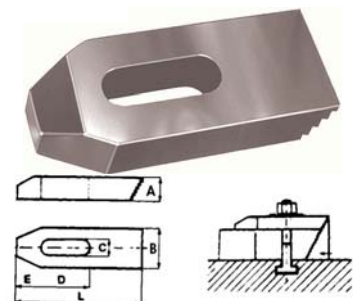

Descrizione di riferimento vedi Art. 2822A

Tipo semplice con estremità dentata.

Art.		2828A	2828B	2828C	2828D	2828E	2828F
Largh. cava (C)	mm	9	11	14	18	22	26
Lungh. (L)	mm	60	80	100	125	160	200
Spessore (A)	mm	15	15	20	25	30	30
Largh. (B)	mm	25	30	40	50	60	70
Filett. vite	M.	8	10	12-14	16-18	20-22	24
Cad.		18,60	27,30	21,40	39,20	49,40	66,50